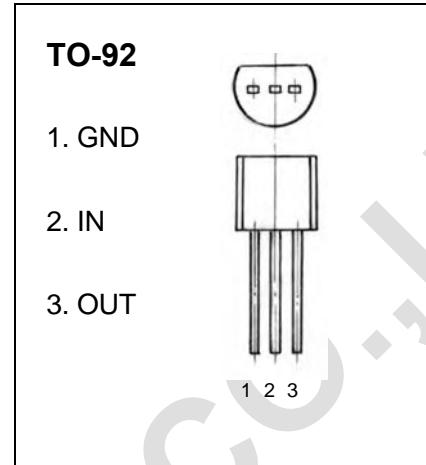


WEJ79L08 Three-terminal negative voltage regulator**FEATURES**

Maximum Output current

I_{OM}: 0.1 A

Output voltage

V_O: -8 V**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V _i	-30	V
Operating Junction Temperature Range	T _{OPR}	0~+125	°C
Storage Temperature Range	T _{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS (V_i=-14V, I_O=40mA, 0°C < T_j < 125°C, C₁=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V _O	V _{IN} =-14V, I _O =40mA	-7.7	-8.0	-8.3	V
Line Regulation	V _O -V _{IN}	V _{IN} =-10.5~ -23V, I _O =40mA		42	200	mV
Load Regulation	V _O -I _O	V _{IN} =-14V, I _O =1~100mA		30	100	mV
Quiescent Current	I _Q	V _{IN} =-14V, I _O =40mA			6.0	mA
Ripple Rejection	RR	V _{IN} =-11V~ -21V, I _O =40mA, e _{iN} =1V _{P-P} , f=120Hz	37	46		dB
Output Noise Voltage	V _{NO}	V _{IN} =-14V, f=10Hz~100KH, I _O =40mA		54		μV

TYPICAL APPLICATION