


## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters,  
free wheeling ,and polarity protection applications
- Dual rectifier construction
- High temperature soldering guaranteed:260° C/10 seconds,,  
0.25"(6.35mm)from case
- Component in accordance to RoHS 2002/95/EC and  
WEEE 2002/96/EC

## MECHANICAL DATA

- Case: JEDEC TO-277 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750,method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.041ounce, 1.12 grams

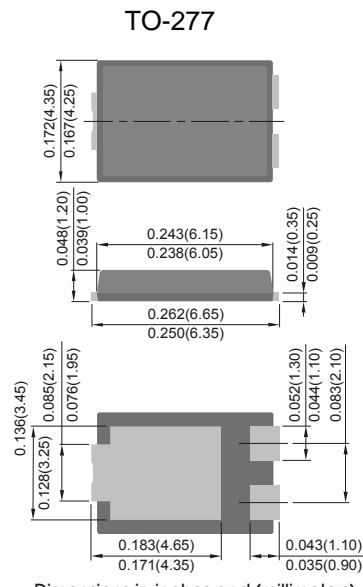

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25 °C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	SP 1535L	SP 1545L	SP 1550L	SP 1560L	SP 15100L	SP 15150	SP 15200L	Units						
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	35	45	50	60	100	150	200	Volts						
Maximum RMS voltage	V <sub>RMS</sub>	25	32	35	42	70	105	140	Volts						
Maximum DC blocking voltage	V <sub>DC</sub>	35	45	50	60	100	150	200	Volts						
Maximum average forward rectified current See Fig. 1	I <sub>(AV)</sub>	15.0							Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150.0							Amps						
Maximum instantaneous forward voltage at 15 A	V <sub>F</sub>	0.50		0.55		0.70	0.80	0.85	Volts						
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	I <sub>R</sub>	T <sub>c</sub> =25°C T <sub>c</sub> =125°C	0.3				50								
Typical thermal resistance (Note 2)	R <sub>θJC</sub>	3.0							°C/W						
Operating junction temperature range	T <sub>J</sub>	-65 to +150							°C						
Storage temperature range	T <sub>STG</sub>	-65 to +150							°C						

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Thermal resistance from junction to case

## SP1535L THRU SP15200L RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

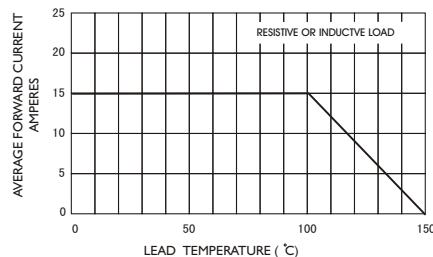


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

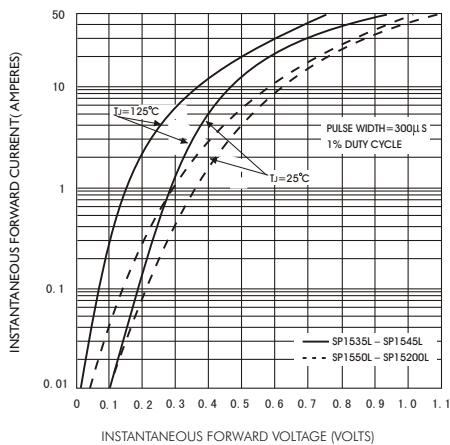


FIG.5-TYPICAL JUNCTION CAPACITANCE

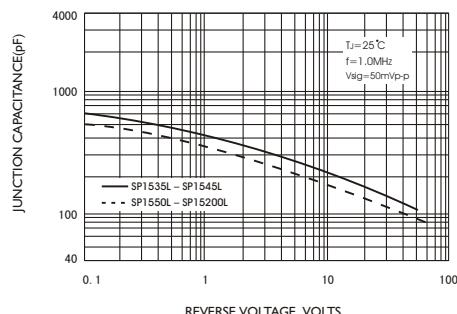


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

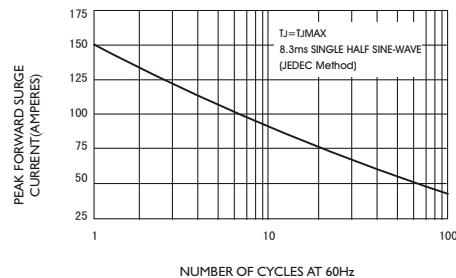


FIG.4-TYPICAL REVERSE CHARACTERISTICS

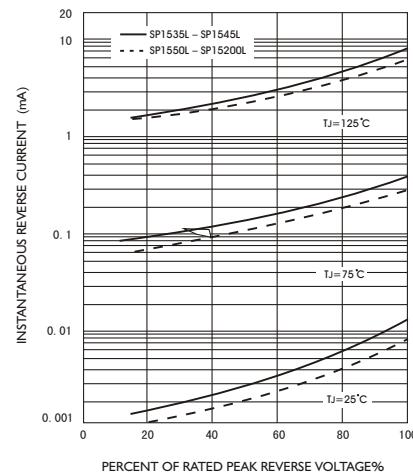


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

